



PRODUCT DATA

Grade 80 Connecting Link

Connecting links easily connect lifting components to chains and eyes.

Applications	
•	Use with Grade 80 lifting components
•	Connecting lifting components to chains and other fittings


Material	Grade 80
-----------------	----------

Finish	Powder Coat
---------------	-------------



Features

- Conforms to AS 3776
- 100% magnaflux crack detection

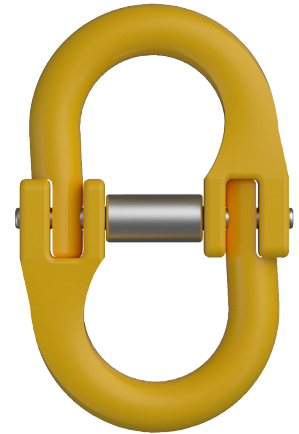


Part	QFind	Size	WLL	BL	Dimensions				
					A (mm)	B (mm)	L (mm)	K (mm)	H (mm)
ULCL08PCL-06	CCL6	6	1.12	4.48	15.00	7.5	58.0	42.0	7.0
ULCL08PCL-08	CCL8	8	2.00	8.00	20.50	9.5	79.5	60.5	8.5
ULCL08PCL-10	CCL10	10	3.15	12.60	26.00	12.0	90.5	68.0	11.5
ULCL08PCL-13	CCL13	13	5.30	21.20	30.00	15.0	117.0	87.0	15.0
ULCL08PCL-16	CCL16	16	8.00	32.00	35.00	19.8	148.0	108.4	19.8
ULCL08PCL-18	CCL18	18	10.00	40.00	38.00	21.0	154.0	112.0	21.0
ULCL08PCL-20	CCL20	20	12.50	50.00	41.00	24.0	169.5	121.5	24.0
ULCL08PCL-22	CCL22	22	15.00	60.00	49.50	26.0	193.5	141.5	26.0
ULCL08PCL-26	CCL26	26	21.20	84.80	57.50	31.0	220.0	158.0	30.0
ULCL08PCL-32	CCL32	32	31.50	126.00	67.50	38.0	281.0	205.0	37.0



MARKINGS:

- **CE** (European Conformity)
- **WLL** (Working Load Limit)
- **Trace Code** (linked to certificate online)
- **Manufacturer's mark**



You can download this Test Certificate and/or Report from our website:

hobson.com.au

Disclaimer: while every reasonable effort has been made to ensure that this document is correct at the time of printing, Hobson Engineering®, its agencies and employees disclaim all liability in respect to anything or the consequences of anything done or omitted regarding the whole or any part of this document.

Bolt Tension | Anti-Vibration | Product Reliability | Traceability

hobson.com.au **QUALITY FASTENERS SINCE 1935**

