



# PRODUCT DATA


## Metal SDS Countersunk

### Description

Countersunk self-drilling screw with square drive for drilling into metal and ensuring better resistance to cam outs over Phillips drives.


# DRILLX®

## 10 Gauge Countersunk Head

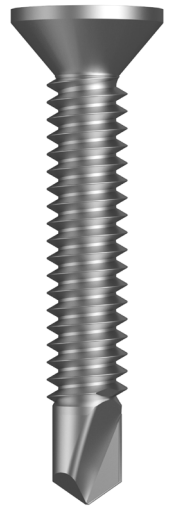


Applications	
•	Sheds
•	Signage
•	Fences and gates
•	Wall cladding sheds
•	Hinges into metal posts

<b>Material</b>	 C1022 Hardened
-----------------	--

<b>Finish</b>	 Class 3
---------------	---

### Dimensions

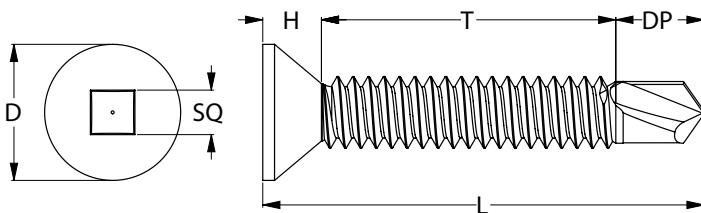

Part	QFind	Gauge	TPI	Length	Thread Length	Drill Point Length	Head Height	Head ø	Drive Size
				L (mm)	T (mm)	DP (mm)	H (mm)	D (mm)	SQ
T9PM3CQ1016100	<b>QT155</b>	10	16	100	89.5	6.5	4	9	SQ #2
T9PM3CQ1016125	<b>QT156</b>	10	16	125	114.5	6.5	4	9	SQ #2

Disclaimer: while every reasonable effort has been made to ensure that this document is correct at the time of printing, Hobson Engineering®, its agencies and employees disclaim all liability in respect to anything or the consequences of anything done or omitted regarding the whole or any part of this document. HEC product marking is the manufacturing mark of Hobson Engineering. HEC is a registered trademark of Hobson Engineering.

Bolt Tension | Anti-Vibration | Product Reliability | Traceability

[hobson.com.au](http://hobson.com.au) **QUALITY FASTENERS SINCE 1935**





# PRODUCT DATA

## Metal SDS Countersunk

### Pullout Values

Plate (Purlin)	Metal Plate Thickness	<sup>1</sup> Mean Load	<sup>2</sup> Characteristic Load	<sup>3</sup> Working Load
	(mm)	(N)	(N)	(N)
G2	0.7	850	650	250
G2	1.1	1500	1300	500
G550	1.5	3300	3050	1200
G450	2.0	4300	3850	1550
G450	2.5	6400	6000	2400

### Mechanical Properties

Torsional Strength	<sup>1</sup> Mean Tensile Strength	<sup>1</sup> Mean Shear Strength	<sup>2</sup> Characteristic Tensile Strength	<sup>2</sup> Characteristic Shear Strength
(Nm)	(N)	(N)	(N)	(N)
7.3	13250	7950	12400	7450

Note: 1000N = 1kN

<sup>1</sup> Mean Load/Strength: the average ultimate strength of samples tested.

<sup>2</sup> Characteristic Load/Strength: 95% of these screws are expected to have a strength greater than the loads shown.

<sup>3</sup> Working Load: the governing minimum allowable load obtained by comparing relevant concrete and steel working loads. Factors of Safety (FOS = 2.5 for steel, FOS = 2.5 for timber and FOS = 3.0 for concrete) are already included.

All values are obtained under laboratory conditions using DRiLLX® products. Safety factors should be considered for design purposes. Actual pullout loads may differ depending on certain properties of the base material.

Disclaimer: while every reasonable effort has been made to ensure that this document is correct at the time of printing, Hobson Engineering®, its agencies and employees disclaim all liability in respect to anything or the consequences of anything done or omitted regarding the whole or any part of this document. HEC product marking is the manufacturing mark of Hobson Engineering. HEC is a registered trademark of Hobson Engineering.

Bolt Tension | Anti-Vibration | Product Reliability | Traceability

[hobson.com.au](http://hobson.com.au) **QUALITY FASTENERS SINCE 1935**





# PRODUCT DATA

## Metal SDS Countersunk


### Installation

1. Use a cordless screw driver set at max. 2,200–3,000 RPM. Fit the Square Drive Bit over the screw and place at the fastening position.
2. Consistently apply firm pressure to the screw driver while drilling.
3. Take care not to overtighten the screw.

\*Installation with impact drivers not recommended.

### Recommended for use with:

POWER SQUARE S2 ALLOY STEEL / STANDARD DRIVE BIT 1/4		
Part	QFind	Length
		(mm)
TXDDISQS20025	QD11	25
TXDDPSQS20050	B370	50
TXDIISQS20025	B365	25
TXDIPSQS20050	B371	50
TXDIPSQS20100	B375	100
TXDIPSQS20150	B380	150



Recommended Square #2 Drive Bit

Disclaimer: while every reasonable effort has been made to ensure that this document is correct at the time of printing, Hobson Engineering®, its agencies and employees disclaim all liability in respect to anything or the consequences of anything done or omitted regarding the whole or any part of this document. HEC product marking is the manufacturing mark of Hobson Engineering. HEC is a registered trademark of Hobson Engineering.

Bolt Tension | Anti-Vibration | Product Reliability | Traceability

[hobson.com.au](http://hobson.com.au) **QUALITY FASTENERS SINCE 1935**

